

LeddarOne

Single-Segment LiDAR Sensor Module



Drones

LeddarOne Overview


The LeddarOne single-segment LiDAR sensor module is dedicated to detecting objects and providing precise distance measurements at up to 40 m.

The narrow LED illumination beam offers excellent overall range and performance, supported by Leddar technology's patented digital signal processing algorithms. This single-detection-segment sensor module is particularly suitable for applications such as optical range finding, drone altimetry, level sensing, proximity measurement, security and surveillance, vehicle detection and height warning.

The module's compact size, low power consumption and high accuracy gives developers and integrators great flexibility to enhance their own branded products and applications.

Interfaces and Communication

The LeddarOne offers an efficient six-pin interface, including a 3.3 V UART link, or RS-485. The module uses the MODBUS protocol, providing a robust, standard register-access interface for easy configuration and acquisition of measurement data. An interrupt signal is also provided to facilitate low-latency data acquisition. The power and interface signals are included on a six-pin standard 0.1-inch pitch header. The RS-485 option, in combination with MODBUS, makes it easy to integrate multiple sensors with an RS-485 network.

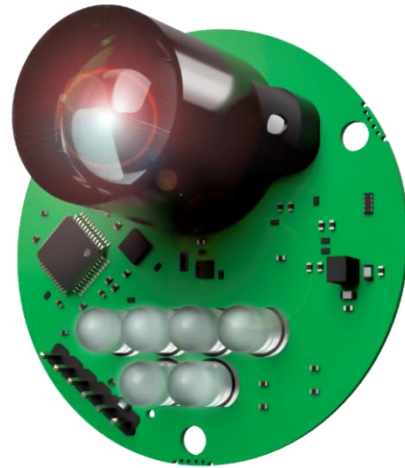


Configuration Software and Development Kit (SDK)

To facilitate development and integration, dedicated configuration software (Leddar Configurator) and a development kit (Leddar Enabler SDK) are included with the module. The Leddar Configurator enables users to set up the sensor and view, record or play back sensor measurement data. The Leddar Enabler SDK includes an example program and complete source code that demonstrates configuration and data acquisition through the serial link and MODBUS protocol. The code can be easily ported to any system, resulting in rapid integration into the final application.

LeddarOne Features

- 3° diffuse beam
- 0 to 40-meter detection range (130 ft)
- Rapid data acquisition time (up to 140 Hz)
- Compact (2-in;51mm diameter) and lightweight

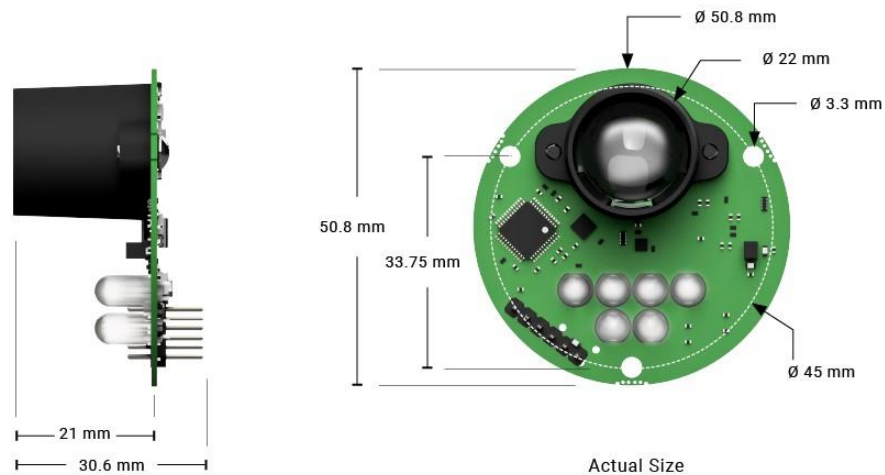

Interface Pinouts					
1	2	3	4	5	6
GND	IRQ	5V	RX OR RS-485+	TX OR RS-485-	RESET_N

LEGEND:

RX/TX = 3.3 UART

RS-485+ / RS-485- = RS-485

The power and interface signals are included on a six-pin standard 0.1-inch pitch header.

The RS-485 option, in combination with MODBUS, makes it easy to integrate multiple sensors with an RS-485 network.

Characteristics

- **Beam** 3°
- **Diameter** 50.8 mm
- **Wavelength** 850 nm
- **Power supply** 5 VDC
- **Interfaces** 3.3 V UART or RS-485
- **Weight** 14 g

Optional Accessories

- **USB to 3.3 V UART cable** (part number: 74D0002)
- **USB to RS-485 cable** (part number: 74D0001)
- **Bracket for standard tripod mount** (1/4in -20) (part number:74D0003)
- **Starter kit, including bracket, screws and cable**

System Performance

- **Detection range** 0 to 40 meters (130 ft)¹
- **Accuracy** 5 cm
- **Data refresh rate** Up to 140 Hz
- **Operating temperature range** -45 °C to +85 °C
- **Distance precision** 5 mm
- **Distance resolution** 3 mm
- **Power consumption** 1.3 W
- **Meets IEC 62471 2006 criteria** Exempt lamp classification

Mechanical Integration

- **Easy to install** (three screws)
- **Ideal for NPT fitting**

¹ Varies according to target.

LeddarTech®

CANADA – USA – AUSTRIA – FRANCE – GERMANY – ITALY – ISRAEL – HONG KONG – CHINA

Head Office
 4535, boulevard Wilfrid-Hamel, suite 240
 Québec (Québec) G1P 2J7
 Canada
leddartech.com

Phone: + 1 418.653.9000
 Toll free: + 1 855.865.9900
 Fax : + 1 418.653.9099