

Leddar™ T16

**Solid-State LiDAR Traffic Sensor
with IP67 weatherproof enclosure**



ITS

Overview

The Leddar T16 Traffic Sensor is a 2D solid-state LiDAR that is specifically designed for traffic management systems—from city to highway applications. Packaged in a weatherproof housing, the Leddar T16 offers cost-efficient and highly accurate detection for various Intelligent Transportation System (ITS) applications, such as electronic tolling, traffic monitoring and traffic law enforcement. At the heart of the sensor resides the patented Leddar digital signal processing technology, which provides superior detection, location and measurement capabilities for all types of traffic, including vehicles, pedestrians and cyclists. The Leddar T16 measures both the distance and angular positioning for each detected target. The collected data enables functionalities, such as vehicle profiling, speed measurement, and traffic data collection.

Advanced Vehicle Detection and Measurement

The Leddar T16's flash illumination emitted by its LED sources covers the sensor's complete field of view. Capturing the return echoes of these diffused light pulses through 16 independent active detection elements at a high acquisition rate, the Leddar T16 Traffic Sensor continuously provides rapid and accurate detection and ranging in the entire beam without any moving mechanical parts. The returned signals are digitized and processed through innovative algorithms, allowing the reliable detection and measurement of a wide range of objects under the most challenging environmental conditions, such as rain, snow and fog.



Peace of Mind and Ease of Use


Thanks to its robust solid-state design, the Leddar T16 Traffic Sensor provides high reliability and reduces maintenance costs compared to mechanical scanning LiDARs. Housed in a resistant and weatherproof enclosure (IP67 ingress protection), the Leddar T16 traffic sensor is built for year-round operation over very wide temperature ranges. It uses industry-standard Power over Ethernet (PoE+) connection, with the same cabling providing both power and data communication to the sensor, thereby reducing installation costs.

With its above-ground installation, the Leddar T16 Sensor is designed to be rapidly integrated with current traffic infrastructure. The optional onboard image sensor (provided with the "Traffic" configuration) allows the Leddar T16 to easily be configured remotely, providing rapid alignment with desired detection areas and simplifying maintenance operations.

All T16 sensors come with a software development kit, the Leddar Enabler SDK, which provides a user-friendly application programming interface (API) with C libraries, and code examples for Windows.

Leddar T16 Features

- Robust solid-state flash LiDAR design
- Measurement rate of 196 Hz for high-speed vehicle detection
- Fully IP addressable
- Single Cat 5e Ethernet cable – Power over Ethernet (PoE+)
- IP67 weatherproof enclosure
- Integrated video sensor with Pan & Tilt actuator (traffic configuration)

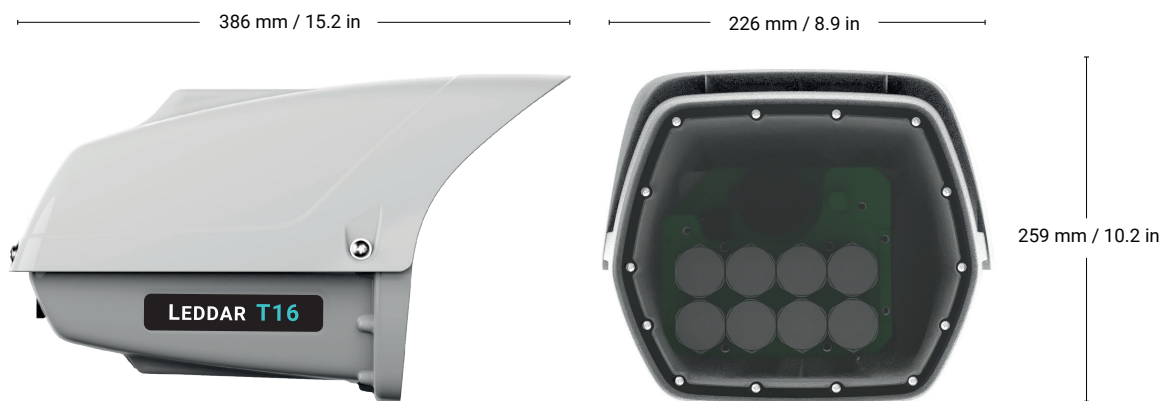

Configurations	Tolling	Traffic
Beam FOV options	9° to 48°	9° to 36°
IP67 housing	Yes	Yes
Anti-reflective window surface treatment	Yes	No
Leddar configuration software	Yes	Yes
Color image sensor (MPEG-4 video feedback)	No	Yes
Pan & Tilt actuator	No	Yes
Enclosure sunshade	No	Yes

CHARACTERISTICS

- **Beam FOV options (H/V)**
9°/1.6°, 19°/3.0°, 26°/4.2°, 36°/5.9°, 48°/7.5°
- **Number of segments** 16
- **Wavelength** 940 nm
- **Weight** 3 kg (6.6 lbs)
- **Power supply** IEEE 802.3at PoE (Power over Ethernet), 48 VDC
- **Mounting** Compatible with standard traffic hardware
- **Ingress protection** IP67
- **Ocular safety** IEC 62471 2006 criteria: Exempt lamp classification
- **FCC** Yes (Part 15, Subpart B, Class A)
- **ICES-003** Class A
- **CE** Yes

SYSTEM PERFORMANCE

- **Detection range**¹ up to 75 m
- **Accuracy** ±5 cm
- **Data refresh rate** 196 Hz
- **Operating temperature range** -40° C to + 60° C (-40° F + 140° F)
- **Power consumption without heater** 15W
- **Power consumption with heater** 25.5W

1 : Varies with configuration and target

INTERFACE OPTIONS

- **Ethernet Cat 5e RJ45 Plug Kit :**
Shielded Cat 5e RJ45 plug
Bayonet-locking coupling/protective connector
- **Leddar T16 uses LeddarTech's proprietary communication protocol (TCP/IP socket-based protocol called lpv4).**

ORDERING INFORMATION

LEDDAR - T16 - XX - XX

Configuration

TR: Traffic
TO: Tolling

Beam

09°, 19°, 26°, 36°, 48°

(48° beam available only with Tolling configuration)

LeddarTech Head Office

4535 Wilfrid-Hamel Blvd., Suite 240
Quebec City (QC), G1P 2J7
Canada

leddartech.com

Phone: 1-418-653-9000
Toll Free: 1-855-865-9900
Fax: 1-418-653-9099

CANADA

Quebec City
Montreal
Toronto

USA

Detroit, MI
Austin, TX
San Jose, CA

EUROPE

Linz, Austria
Lyon, France
Munich, Germany
Milan, Italy

ASIA

Hong Kong, HK
Shenzhen, China

Leddar™ technology is covered by one or more of the following U.S. patents: 7855376B2, 7554652, 8319949B2, 8310655, 8242476, 8908159, 8767215B2 or international equivalents. Other patents pending. Find the most recent version of our datasheet on our website. LeddarTech, the LeddarTech logo, Leddar, LeddarCore, LeddarOne, LeddarEngine, are trademarks or registered trademarks of LeddarTech Inc. The content of this spec sheet is subject to change without notice. 54C0018-1EN / Ver. 20191218

© LeddarTech Inc. All rights reserved.