

LeddarVision™ LVF-H

Comprehensive Extended Front-View ADAS L2/L2+ Highway Assist and 5-Star NCAP 2025/GSR 2022 Low-Level Fusion and Perception Software Stack

Product Overview

LVF-H is a comprehensive fusion and perception software stack supporting extended front-view L2/L2+ ADAS highway assist and 5-star NCAP 2025/GSR 2022 safety applications. LVF-H implements a premium stack handling sensors' interface, offline and online calibration and diagnostics, sensor synchronization, sensor fusion, object detection and classification, extended to include unclassified objects and events (e.g., cut-in), continuous tracking and stabilization, free space detection, road model, comprehensive traffic sign detection, highway traffic light detection, vehicle odometry interface, ego-motion localization and global localization with HD Map input. Stack further provides ability to fuse external sensors such as HD Map and V2X into a single and unified environmental model. Stack extends safety features support with detected objects trajectory prediction, perception decomposition, perception support to ODD analysis, sensor coverage and health monitoring. The complete stack extends perception, positioning and prediction features providing a comprehensive single and unified environmental model and API to extended L2/L2+ and highway assist ADAS applications.

Based on LeddarVision™ low-level fusion (LLF) and perception technology, it enables an **extended L2/L2+ highway assist ADAS offering at lower sensor and hardware cost.** LLF technology optimally combines sensor modalities, pushing performance envelope far beyond legacy solutions and extending supported object detection fusion range over 200 m. LVF-H extends the front camera-based configuration to a **1V5R configuration**, having a **single wide FoV (120°) front camera, one medium-range front radar and four short-range front and back corner radars.** Front camera and medium-range radar extends the **fusion range over 200 m and ACC support up to 160 km/h.** The back short-range corner radars **extend the support of GSR 2022 and 5-star NCAP 2025 to overtaking/reverse/dooring scenarios** and the **highway assist features support to lane change collision warning.**

LVF-H superior object detection performance further extends to occluded VRUs and vehicles, providing early warning in NCAP tested scenarios (e.g., occluded cyclist tests). Superior object separation and longitudinal position measurement accuracy in highway scenarios leads to higher performing ACC implementation. Inherent sensor redundancy provides a more reliable operation in presence of degraded (e.g., dirty lens), failing (e.g., failing camera) or conflicting sensors (e.g., false alarms from radars in presence of guard rails' multipath) and adverse scenarios and environments (e.g., dust, blinding light, etc.).

LVF-H product is part of a family of front- and surround-view products targeting base to extended ADAS. A comprehensive product roadmap provides growing features support for different market segments, including support of sensor configurations from 1V2R in base front-view to 5V5R in extended surround-view. The LVS platform architecture scalability enables implementation of entry-level to premium configuration on a single architecture. LVF-H takes advantage of the LVS platform scalability to introduce "B" sample as a 1V5R derivative of the extended LVS' 5V5R. "B" sample of LVF-H is, hence, introduced on the Orin SoC, which is used for LVS "B" sample introduction. Subsequent implementations of LVF-H software stack targeting lower-cost ECU are possible, depending on customer requirements.

LVF-H targets vehicle SOP for 2026.

Target Applications


- Economical extended L2/L2+ ADAS highway assist applications
- Safety: GSR 2022 and 5-star NCAP 2025 (SA, VRU), including AEB C2C & VRU, FCW, LDW, LCA, FCTA, LSS, TLR, LCDAS, RCW, RCTA, SAS, ELK, LKA, BSD, TSR.

- Driving: L2/L2+ highway assist, including ACC (up to 160 km/h), LCC, ALCA, TJA, HWA. Including semi auto lane change support.


Hardware Platform

- Sensor configuration: 1V5R
- Front camera: 120° FoV
- Front radar: One medium-range radar (Continental ARS510 or similar)
- Corner radars: Four short-range corner radars (Continental SRR520 or similar)
- SoC/memory: Orin (“B” sample); cost-optimized product possible, depending on customer requirements.

LVF-H Sensor Configuration

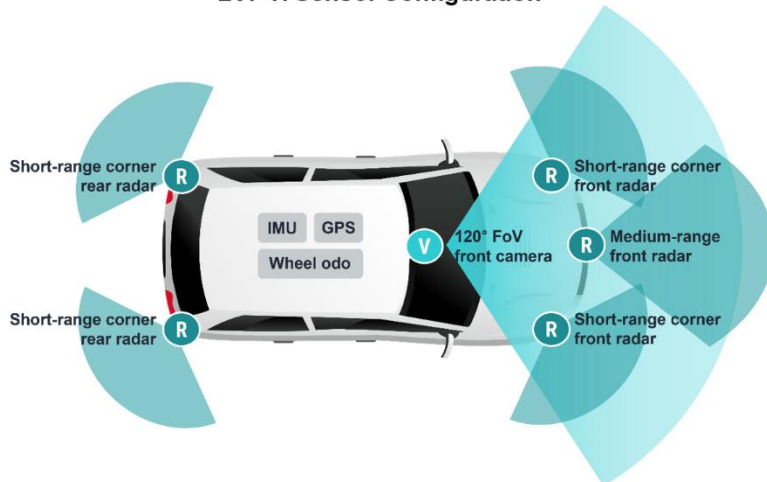

Software Functional Diagram

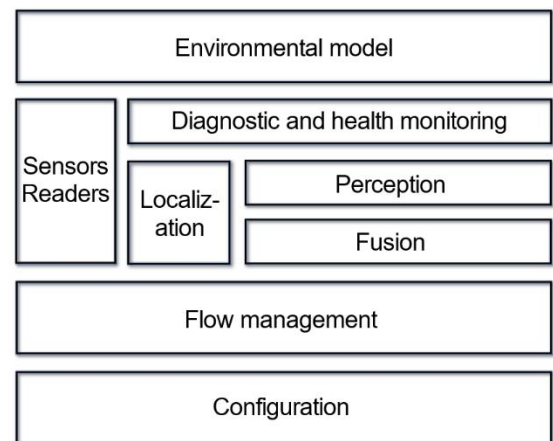

Software Stack Features

Fusion	Radar-camera low-level fusion Offline, online radar-to-camera calibration and diagnostics
Perception	Dynamic and static 3D object detection and classification, including vehicles and VRUs extended to L/R lanes Road model: L/C/R lanes based on lane line detection (solid, dashed, color), traffic island and road edge detection Speed traffic sign detection (SAS/ISA support) Object continuous tracking and stabilization, 15 FPS output
Premium perception	Unclassified object detection Event detection (e.g., cut-in) Free space detection Traffic sign and highway traffic light detection Fuses external sensors such as HD Map and V2X into a single and unified environmental model
Premium prediction	Detected objects trajectory prediction
Positioning	Ego-motion, GPS, IMU and vehicle dynamics-based odometry (wheels)
Premium positioning	Global localization with HD Map input

Premium safety	Detection of global scene attributes to support ODD analysis Sensor coverage and health monitoring Perception decomposition	
Supported ODDs	Weather/illumination: day / low light / night with streetlights, light rain Road topography and conditions: highway, poor road marking visibility, high lane curvatures. Highway special lanes, including entrances, exits, toll, service and ramps. ODD extended to cover 5-star NCAP 2025 test scenarios	
Environmental model	Objects (3D, classification), free space, road model, ego-motion data in vehicle coordinates (in global coordinates – TBD) and diagnostics (TBD)	
Operating system	Linux	
Interfaces	Sensors:	ROS2
	Vehicle odometry:	CAN
	GPS, IMU:	CAN
	Environmental model:	ROS2, ECAL

Perception Key Performance Indicators (KPIs)

Object detection	Vehicles (CIPV):	Typ. range >200 m
	Vehicles (rear end):	Typ. range >100 m
	VRUs (ego-path):	Typ. range 60 m
	Ultra-low FPR on objects in danger zone (within 2.5 sec TTC) to support safety features in danger zone with perception decomposition	
Object measurements	Vehicle (rear-end) accuracy: typ. std longitudinal (1.5 m), lateral (0.5 m), orientation (2 deg) @ 150 m	
	Vehicle (CIPV) 3D bounding box accuracy: typ. std length (0.5 m), width (0.2 m), height (0.3 m) @ 150 m	
Road model	CIPV assignment to ego-lane up to 200 m with recall 95%, precision 99%	
Traffic sign detection	Numerical type signs with recall >95%, precision >99%	
Traffic light detection	TBD	
Global positioning accuracy	Ego-vehicle position <0.1 m, heading <0.2°	
NCAP 2025 test scenarios	Perception shall support gaining >90% score of SA and VRU relevant tests.	

LVF-H Features Roadmap Schedule

- Orin platform: 2023
- TSR for SAS/ISA support: 2023
- Extended road model: 2023
- Extended object detection: 2023 (extended to L/R lanes to support 5-star NCAP overtaking/reverse/dooring scenarios)
- Extended ODD: 2024
- Comprehensive TSR/TLR: 2024
- Premium perception: 2024
- Premium positioning: 2024
- Premium safety: 2024

Certifications

- ASPICE: Developed according to ASPICE L2, targeted by Q3 2024.
- ASIL-B certification targeted.

Availability

- "A" sample: Available since Q2 2022
- "B" sample: Q1 2024 (on LVS platform)
- Target vehicles: SOP 2026